

TECHNICAL DATA

Fluke 317/319 Clamp Meters





Key features

The two models are economic, compact and offer a range of special features:

- Unique 40A high-precision low current measurement--0.01A high-resolution, 1.6% high-precision measurement
- The clamps are slim, lightweight, and portable, making them ideal for use in small, confined spaces
- The large backlight display facilitates readings in dark environments
- Starting current (inrush) functionality (319) allows measurement of the starting current of electrical and lighting equipment, for example. (319)
- Current frequency measurement
- Precision down to 0.01A and 0.1V
- 1000A/600A AC/DC current measurement (319/317)
- 600V AC/DC voltage measurement
- 4000Ω resistance measurement
- Continuity beeper
- Auto off function enhances battery life, meaning the instrument can work when you need it screen store 'hold' function for capturing a measurement result on the screen
- One year warranty

Product overview: Fluke 317/319 Clamp Meters

The Fluke 317 and 319 are designed with ergonomic concepts, shaped to fit your hand and to access tight spots easily. These small and rugged clamp meters are ideally suited for current measurements up to 1000 A (319) in tight cable compartments. The Fluke 317 and 319 also offer AC/DC current measurements and has a higher resolution for loads below 40 A. In addition to a compact package with a strong feature set, the Fluke 319 also equip with In-rush current and

Frequency functions for testing motors, lighting, etc.

Specifications: Fluke 317/319 Clamp Meters

| General specifications | | | |
|-------------------------------|---|-----------------------------------|--|
| Digital display | 6000 count resolution | | |
| Low battery Indication | Displays a signal when the batteries are below their required voltage | | |
| Power source | Three AAA IEC LR03 batteries | | |
| Clamp opening size | 1.45 in (37 mm) | | |
| Jaw diameter | 1.45 in (37 mm) | | |
| Dimensions (L x W x H) | 9.21 in x 2.95 in x 1.37 in | | |
| | (234.0 mm x 75.0 mm x 34.8 mm) | | |
| Weight | Approximately 13.5 oz (384 g) (batteries included) | | |
| Auto range | Available in Ohms | | |
| Safety | CE | | |
| | EN/IEC 61010-1 and IEC 61010-2-032 | | |
| | Measurement Category: 600V CAT III | | |
| 317 Electrical specifications | | | |
| Current AC | Range | 40.00 A, 600.0 A | |
| | Resolution | 0.01 A, 0.1 A | |
| | Accuracy | 1.6% ±6 digit (50-60 Hz) {40 A} | |
| | | 2.5% ±8 digit (60-500 Hz) {40 A} | |
| | | 1.5% ±5 digit (50-60 Hz) {600 A} | |
| | | 2.5% ±5 digit (60-500 Hz) {600 A} | |
| | Crest Factor add 2% into spec for CF > 2 | 3.0 Max @ 500 A, 2.5 Max @ 600 A | |
| AC response | rms | | |
| Current DC | Range | 40.00 A, 600.0 A | |
| | Resolution | 0.01 A, 0.1 A | |
| | Accuracy | 1.6% ±6 digit (40 A) | |
| | | 1.5% ±5 digit (600 A) | |
| Voltage AC | Range | 600.0 V | |
| | Resolution | 0.1 V | |
| | Accuracy | 1.5% ±5 digit (20-500Hz) | |
| | AC response | rms | |

| | | |
|------------|--------------------|--------------------------------|
| Voltage DC | Range | 600.0 V |
| | Resolution | 0.1 V |
| | Accuracy | 1% \pm 4 digit |
| Resistance | Range | 400.0 Ω , 4000 Ω |
| | Resolution | 0.1 Ω , 1 Ω |
| | Accuracy | 1% \pm 5 digit |
| Continuity | \leq 30 Ω | |
| Inrush | Integration time | N/A |
| Frequency | Range | N/A |
| | Accuracy | N/A |
| | Trigger Level | N/A |

319 Electrical specifications

| | | |
|-------------|--|--|
| Current AC | Range | 40.00 A, 600.0 A, 1000 A |
| | Resolution | 0.01 A, 0.1 A, 1 A |
| | Accuracy | 1.6% \pm 6 digit (50-60 Hz) {40 A} |
| | | 2.5% \pm 8 digit (60-500 Hz) {40 A} |
| | | 1.5% \pm 5 digit (50-60 Hz) {600/1000 A} |
| | | 2.5% \pm 5 digit (60-500 Hz) {600/1000 A} |
| | Crest Factor add 2% into spec for CF > 2 | 3.0 Max @ 500 A, 2.5 Max @ 600 A, 1.4 Max @ 1000 A |
| AC response | rms | |
| Current DC | Range | 40.00 A, 600.0 A, 1000 A |
| | Resolution | 0.01 A, 0.1 A, 1 A |
| | Accuracy | 1.6% \pm 6 digit (40 A) |
| | | 1.5% \pm 5 digit (600/1000 A) |
| Voltage AC | Range | 600.0 V |
| | Resolution | 0.1 V |
| | Accuracy | 1.5% \pm 5 digit (20-500Hz) |
| | AC response | rms |
| Voltage DC | Range | 600.0 V |
| | Resolution | 0.1 V |
| | Accuracy | 1% \pm 4 digit |


| | | |
|------------|--------------------|---|
| Resistance | Range | 400.0 Ω |
| | | 4000 Ω |
| | Resolution | 0.1 Ω |
| | | 1 Ω |
| Accuracy | 1% \pm 5 digit | |
| Continuity | \leq 30 Ω | |
| Inrush | Integration time | 100 ms |
| Frequency | Range | 5.0 - 500.0 Hz |
| | Accuracy | 0.5% \pm 5 digit |
| | Trigger Level | 10 - 100 Hz \geq 5 A, 5 - 10 Hz, 100 - 500 Hz \geq 10 A |

The accuracy specifications apply at 73 °F \pm 41 °F (23 °C \pm 5 °C)
 Below 64 °F and above 82 °F (18 °C and above 28 °C) accuracy degrades at (0.1) times specification per °C.
 True rms for ac V and ac A accuracy is specified from 5% to 100% of range.

Environmental specifications

| | |
|--------------------------|--|
| Operating temperature | 14°F to 122°F (-10 °C to 50 °C) |
| Storage temperature | -40 °F to 140 °F (-40 °C to 60 °C) |
| Operating humidity | Non-condensing (< 50 °F) (< 10 °C) |
| | 90% RH (50 °F to 86 °F) (10 °C to 30 °C) |
| | 75% RH (86 °F to 104 °F) (30 °C to 40 °C) |
| | 45% RH (104 °F to 122 °F) (40 °C to 50 °C) |
| | (Without condensation) |
| Operating altitude | 1 mile (2000 meters) above mean sea level |
| Storage altitude | 7 miles (12,000 meters) above mean sea level |
| IP Rating | IP40 |
| Vibration requirements | Random MIL-PRF-28800F Class 2, 5-500 Hz, 30 minutes per axis |
| Drop test requirements | 3 ft (1 m) drop test, six sides, oak floor |
| EMI, RFI, EMC | Instrument unspecified for use in EMC field \geq 0.1 V/m |
| Temperature coefficients | 0.1x (specified accuracy)/ °C |
| | (<64 °F or > 82° F) |
| | (<18 °C or > 28 °C) |

Ordering information

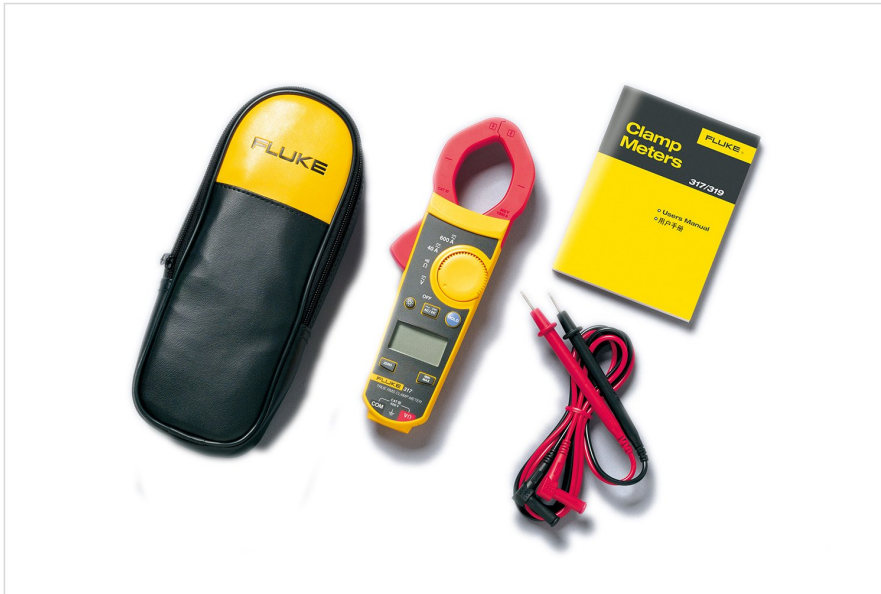

Fluke 317/319

The Fluke 317 and 319 are designed with ergonomic concepts, shaped to fit your hand and to access tight spots easily.

The Meter ships with:

- Test Leads
- Soft Carrying Case
- Three AAA batteries (Installed)
- 317/319 User Manual

These small and rugged clamp meters are ideally suited for current measurements up to 1000 A (319) in tight cable compartments. The Fluke 317 and 319 also offer AC/DC current measurements and has a higher resolution for loads below 40 A. In addition to a compact package with a strong feature set, the Fluke 319 also equip with In-rush current and Frequency functions for testing motors, lighting, etc

Fluke. *Keeping your world up and running.®*

Fluke Corporation
PO Box 9090, Everett, WA 98206 U.S.A.

For more information call:
In the U.S.A. (800) 443-5853
In Europe/M-East/Africa
+31 (0)40 267 5100
In Canada (800)-36-FLUKE
From other countries +1 (425) 446-5500

BUT. FLUKE SOUTH EAST ASIA PTE LTD
Menera Satu Sentra Kelapa Gading #06-05
JI. Bulevar Kelapa Gading Kav. LA# No. 1
Summarecon Kelapa Gading
Jakarta Utara 14240
Indonesia
Tel: +62 21 2938 5922
Email: info.asean@fluke.com
www.fluke.com/id-en
©2025 Fluke Corporation. Specifications subject to
change without notice.
01/2025

**Modification of this document is not permitted
without written permission from Fluke Corporation.**