

Rubber Insulating Mat



INSULATING RUBBER MAT

The diamond insulating rubber mat, Type II, meets the ASTM D178 standard and was specially developed for covering floors in electrical ehouses, cabios and substations, aiming to increase the workers protection against eletrical shocks.

CATEGORY B: Low flame spread.

The marking contains the following indications:

- Manufacturer's name;
- Serial number;
- Standard number;
- Type;
- Class.

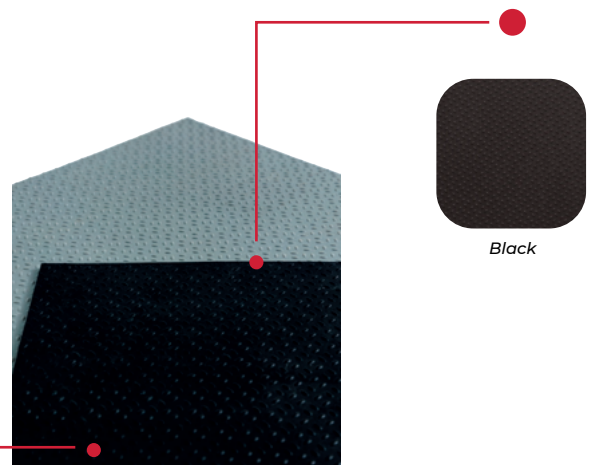



Image for illustrative purposes only.

TECHNICAL SPECIFICATIONS OF RUBBER INSULATING MAT

SURFACE: Diamond – Features the material as non-slip.

BASE: Textured finish for easy anchoring to the floor.

CLASS	ALTERNATING CURRENT		COLOR TAG	THICKNESS (mm)	LEGNTH (mm)	WIDTH (mm)	COLOR MAT
	TEST VOLTAGE (VOLTS)	MAXIMUM USE VOLTAGE (VOLTS)					
0	5.000	1.000	RED	3,2	1.000	610	BLACK
1	10.000	7.500	WHITE	4,8			
2	20.000	17.000	YELLOW	6,4	10.000	760	
3	30.000	26.500	GREEN	9,5			
4	40.000	36.000	ORANGE	12,7	1.000	914	
					a	1220	
					5.000		