


DAL-20 series

High voltage detectors, made in Japan

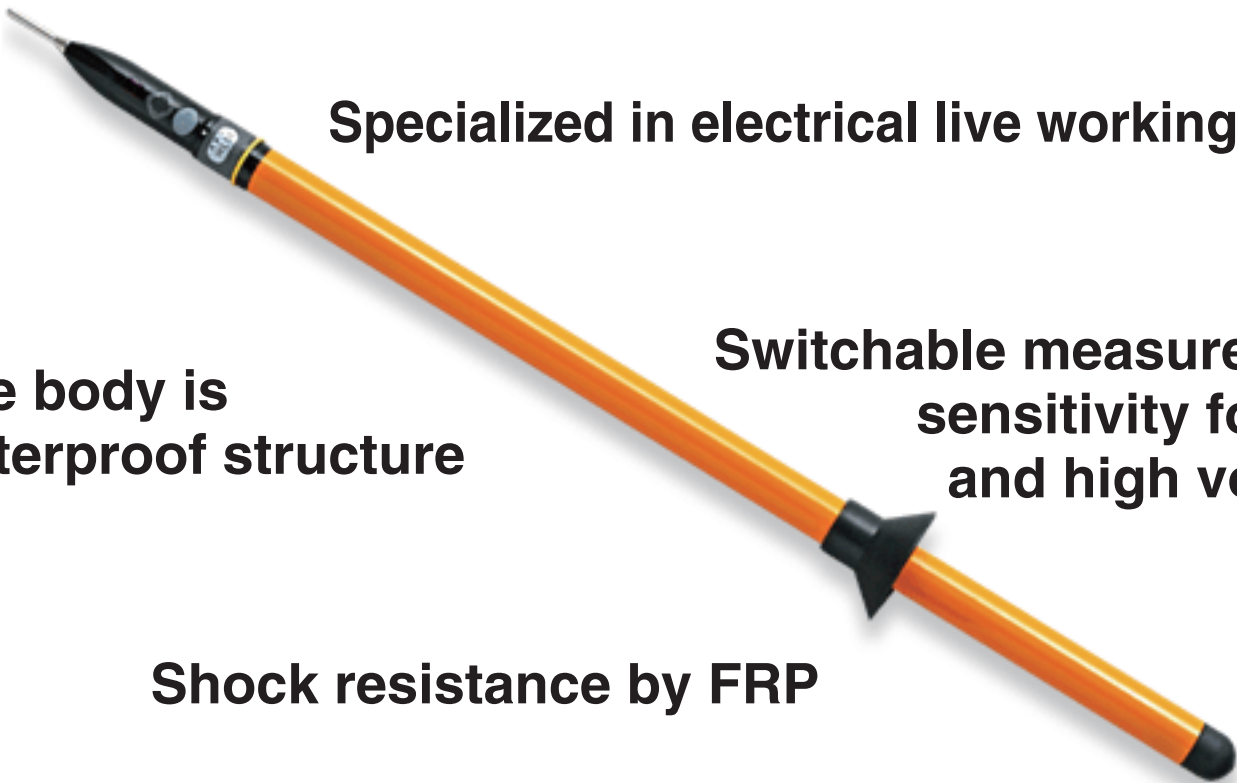

Specialized in electrical live working usage

The body is waterproof structure

Switchable measurement sensitivity for low and high voltage

Shock resistance by FRP

Developed by

Central power grid in Japan

Multi
Measuring
Instruments

Product ID	DAL-20-8	DAL-20・30-12
Voltage range	AC80~600V,1.5~23KV	AC80~600V,1.5~35KV
Initiation of movement voltage (Bare wire/voltage to ground)	Low voltage : AC80V High voltage : AC1500V	
Frequency	50/60Hz	
Indication	Continuity beeping and flashing	
Flashing	Confirmable by 8000lx illuminance	
Beeping	More than 50dB away from 2m	
Withstand voltage	Dry condition : 46kV/1min	Dry condition : 70kV/1min
	After water absorption : 23kV/1min	After water absorption : 35kV/1min
Operating Temperature	-10~40℃	
Power Supply	AAA battery (R03 1.5V) *2(Running time around 7h)	
Dimension	φ28×800mm	φ33×1200mm
Weight	Approx.260g	Approx.360g
Product lifetime	Around 10(ten)year	

MULTI

Established. 1986, Tokyo